


Product data sheet

Profile	Sinusoidal profile 18/76 for roof and wall cladding
Material	Aluminium alloy 3005 -in accordance to DIN EN573-3:2007
Surface	Mill finished , stucco embossed
Surface coating	Polyester, PVdF, HDP, anticondensation flece ; antidrum coating
Length	Up to 15.000mm ex works (more than 15.000mm on request)
Curving	Smooth curving & crimp curving
Perforation	possible (thickness=0,8)
German approval no.	Z-14.1-545
Fire resistance	Class A1

thickness in mm	Area weight in KG/sqm	Cover width
0,35*	1,162	1300
0,4*	1,328	1300
0,5	1,660	1300
0,6	1,992	1300
0,7	2,244	1255
0,8	2,564	1255
1,0	3,205	1255
1,2	3,846	1255

*Without approval

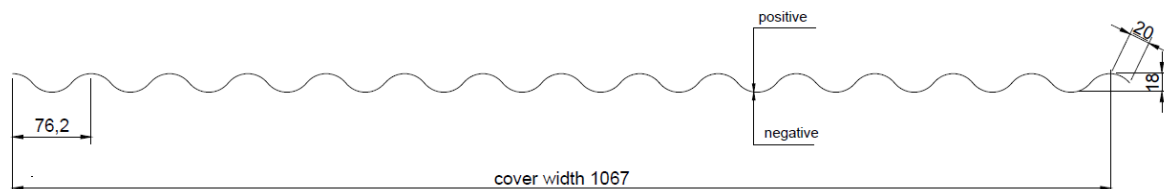

Aluform System GmbH & Co KG
 Dresdener Straße 15
 02994 Bernsdorf
 Germany

T: +49 (0)35723 99-0
 F: +49 (0)35723 99 - 403
 Mail: info@aluform.de
 Web: www.aluform.com

Cladding in accordance to the Aluform mounting instructions